

# CURRENT SENSOR

---

PRODUCT SERIES: STB-CAB500x-xxx

PRODUCT PART NUMBER: STB-CAB500x-xxx

VERSION: Ver 5.3



Sinomags Technology Co., Ltd.

Web site: [www.sinomags.com](http://www.sinomags.com)

## CONTENT

1. Characteristic .....	2
2. General parameters .....	2
3. Electrical parameters .....	3
3.1 Supply Voltage $U_C = 12V$ .....	3
3.2 Supply Voltage $U_C = 24V$ .....	3
4. Total Error Graph for CAB-500.....	4
5. CAB-500 CAN Output specification.....	4
6. Diagnostic Trouble Code (DTC).....	5
7. Dimensions: (in mm) .....	5
8. Application .....	6
9. Product definition statement .....	6

## 1. Characteristic

CAB500 Series current sensor is based on Sinomags Active Close Loop technology, with CANBUS digital output. It can be used to measure 500A rated current. Using a proprietary Digital Compensation technology. This product brings the best combination of performance and reliability.

- Error  $\pm 0.2A$  @  $<\pm 30A$ , Error  $\pm 0.5A$  @  $<\pm 100A$ ; Error  $\pm 1.0A$  @  $\pm 100A\sim\pm 300A$ ; Error  $\pm 1.5A$  @  $\pm 300\sim\pm 500A$ .
- High electromagnetic compatibility against complex electromagnetic interference environment.
- Excellent anti magnetic interference.
- Can bus output, convenient for system integration.
- Ultra-high over current capability

## 2. General parameters

Working temperature:  $-40^{\circ}C\sim+85^{\circ}C$ ;  
Storage temperature:  $-40^{\circ}C\sim+85^{\circ}C$   
Insulation resistance:  $\geq 500 M\Omega$ ;  
Rms voltage for AC insulation test 50Hz 1min 2.5KV  
Over-voltage 24V/1 minute  
Electrostatic discharge voltage 4KV

### 3. Electrical parameters


#### 3.1. Supply Voltage $U_C = 12V$

Parameter	Symbol	Unit	Specification			Conditions
			Min	Type	Max	
Nominal Measuring Range	$I_{PN}$	A	-500		500	
Supply Voltage	$U_C$	V	7.2	12	18	Full accuracy
Current Consumption @ $I_P=0A$	$I_C$	mA		26		$U_C=12V, T=25^\circ C$
Current Consumption @ $I_P=500A$	$I_C$	mA		250		$U_C=12V, T=25^\circ C$
Factory Sensitivity error Accuracy	$X_G$	%	-0.2		0.2	$=-40$ to $85^\circ C$ ; $\pm 3 \sigma (> \pm 30A)$
All Temperature Sensitivity error Accuracy	$X_G$	%	-0.3		0.3	$=-40$ to $85^\circ C$ ; $\pm 3 \sigma (> \pm 30A)$
Offset= $0A$	$I_{OS}$	A		$\pm 0.2$		$=-40$ to $85^\circ C$ ; $\pm 3 \sigma$
Linearity error with $I_{PN}$	$\epsilon_L$	%		0.1		@room temperature
Temperature coefficient of G	TCG	ppm/ $^\circ C$		20		

#### 3.2 Supply Voltage $U_C = 24V$

Parameter	Symbol	Unit	Specification			Conditions
			Min	Type	Max	
Nominal Measuring Range	$I_{PN}$	A	-500		500	
Supply Voltage	$U_C$	V	7.2	24	32	Full accuracy
Current Consumption @ $I_P=0A$	$I_C$	mA		26		$U_C=24V, T=25^\circ C$
Current Consumption @ $I_P=500A$	$I_C$	mA		85		$U_C=24V, T=25^\circ C$
Factory Sensitivity error Accuracy	$X_G$	%	-0.2		0.2	$=-40$ to $85^\circ C$ ; $\pm 3 \sigma (> \pm 30A)$
All Temperature Sensitivity error Accuracy	$X_G$	%	-0.3		0.3	$=-40$ to $85^\circ C$ ; $\pm 3 \sigma (> \pm 30A)$
Offset= $0A$	$I_{OS}$	A		$\pm 0.2$		$=-40$ to $85^\circ C$ ; $\pm 3 \sigma$
Linearity error with $I_{PN}$	$\epsilon_L$	%		0.1		@room temperature
Temperature coefficient of G	TCG	ppm/ $^\circ C$		20		

### 4. Total Error Graph for CAB-500

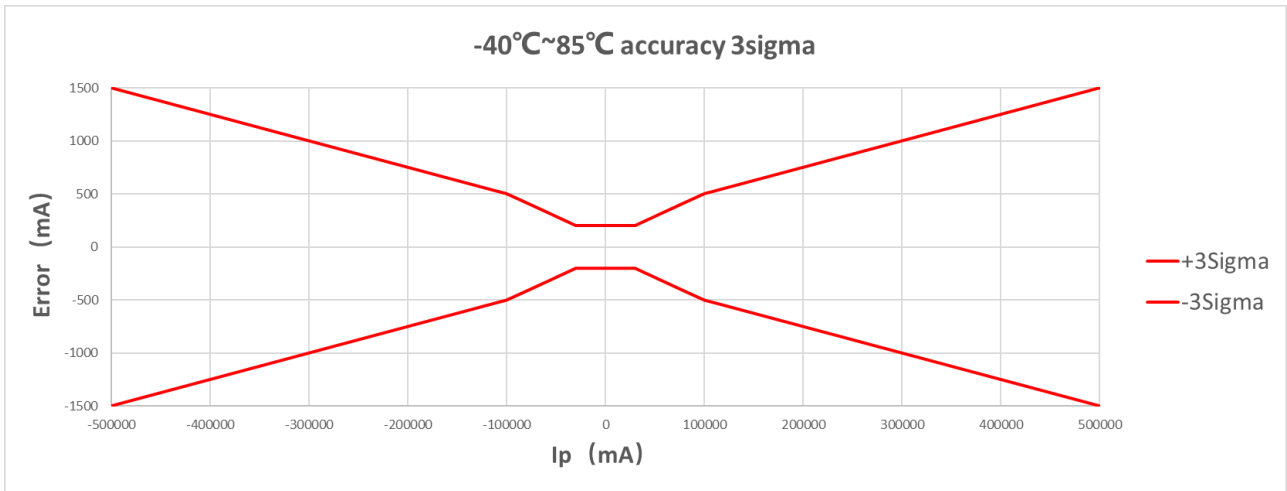

### 5. CAB-500 CAN Output specification

CANBUS speed refer to product version table,

CANBUS protocol: version 2.0A/B

CAN oscillator tolerance: 0.3125%

Byte order: big endian (Motorola)

120 ohm termination resistor to be added externally, internal CAN impedance = 4.8 Kohm


Message Description	CAN ID	name	Data Length (bytes)	Type of frame	Message launch type	Signal description	Signal Name	Start bit	Length
Current Ip (mA)	0x3C2	CAB500	8	standard	Cyclic message every 10ms	Ip Value: 80000000H= 0mA, 7FFFFFFFH= - 1mA, 80000001H= 1mA	IP_VALUE	24	32
						b0:Error information (0=Normal ,1=failure)	ERROR_INDICATION	32	1
						b7-b1:RxQuality (0-100%)	ERROR_INFORMATION	33	7
						Vacant bits (fix to 0)	UNDEFINE	40	8
							PCBA Ver	48	8
							FIRMWARE Ver	56	8

## 6. Diagnostic Trouble Code (DTC)

FAILLURE MODE	Ip VALUE	ERROR INDICATION	ERROR INFORMATION
Overcurrent Detection Ip> Approximate 520A	FFFFFFFF	1	0x41
Closed-loop reference voltage over range	FFFFFFFF	1	0x42
Signal not available for more than 100ms	FFFFFFFF	1	0x44
Supply voltage out of range	FFFFFFFF	1	0x46

## 7. Dimensions: (in mm)

Connector type: TYCO 1473672-1

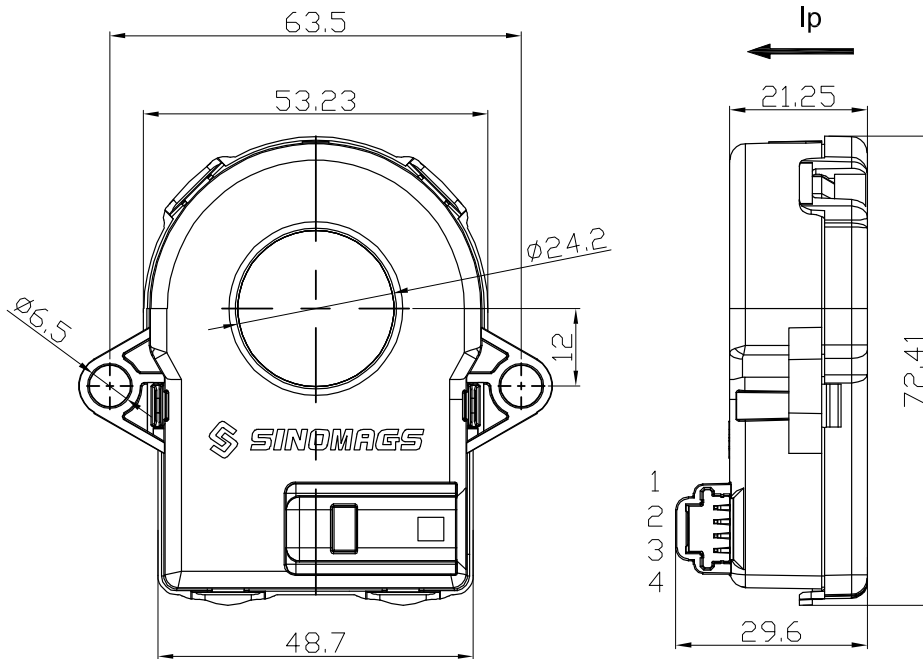


### Terminals

1	CAN-L
2	CAN-H
3	GND
4	Uc

Material : Fit UL94V-0 & RoHS requirements ;

General tolerance :  $\pm 0.5$

Unit :mm



### Mechanical characteristics

1. Unspecified tolerance:  $\pm 0.5$ mm
2. Plastic housing material: PBT+ GF30%
3. Mounting screw M6, torque recommendation 3 Nm
4. Mass: 78g  $\pm$  5g

## 8. Application

- Hybrid and electric vehicle battery pack
- Accurate current measurement for battery management applications

## 9. Product definition statement

	STB	-	CAB	500	M	-	5	2	C
Current sensor									
Product information									
Rated current									
Installing form									
	M:				Perforation $\phi$ 24.2mm, mounting hole $\phi$ 6.5mm				
	N:				Perforation $\phi$ 24.2mm, mounting hole $\phi$ 4.3mm				
Baud rate									
	1:				125k				
	2:				250k				
	5:				500k				
CAN ID									
	1:				3C1				
	2:				3C2				
	3:				3C3				
	4:				3C4				
	5:				3C5				
	9:				3C0				
Edition									
	Blank :				Imported				
	C:				China-Made				
	H:				24V power supply				